


Performance Standard		
Nominal CL (PN)	150LB	Test medium
Shell test pressure	3.0MPa	Water
Seal test pressure	/	
Air test pressure	/	Air
Suitable temperature	-46~120℃	
Suitable medium	Water/Gas/Oil etc	

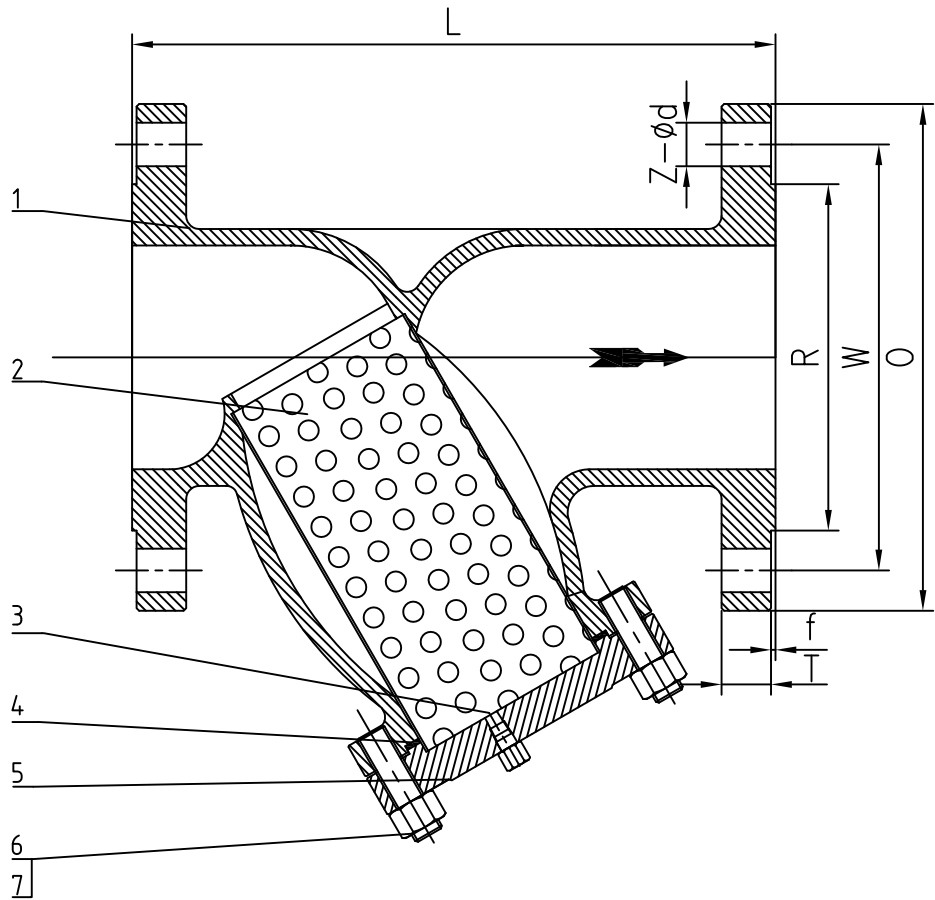

Item	150LB	2"	203	150	120.7	92.1	4-φ19	14.3	2.0	Weight
9	CLASS	NPS	L	O	W	R	Z-φd	T	f	≈8.5kg

7	Nut	A194 8M	
6	Bolt	A193 B8M	
5	Bonnet	A182 F316	
4	Gasket	316+Graphite	
3	Drain	SS316	
2	Screen	SS316	
1	Body	A351 CF8M	
NO.	PARTS NAME	MATERIAL	REMARK
Y-Type Strainer Class 150 RF			
Size	2"	Design&Manu	ASME B16.34
Class	150Lb	Inspection&Test	API 598
Rev.	00	End Connection	ASME B16.5-RF
Man.Fig.		Face-to-face dimension	ASME B16.10

BallValve Technology Co., Ltd.