

FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE

Stainless steel Y strainer flanged PN16 for filtration of fluids in chemical and pharmaceutical industries, petrochemical industries, hydraulic installation, compressed air.

Strainer with removable filter and bolted bonnet

Threaded BSP draining cap allowing to install a draining valve.

2 TFM 4215 gaskets for the bonnet and the cap.

Compatible with explosive atmosphere, ATEX Zone 1&21 and Zone 2&22.



Certificate

3.1



Size : DN15 to DN200

Connection : Flanges RF PN10/16

Min Temperature : -40°C

Max Temperature : +200°C

Max Pressure : 16 Bars

Specifications : Removable stainless steel filter

Bolted bonnet with draining cap

TFM 4215 gaskets

ATEX

Materials : Stainless steel EN 1.4408

FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE


SPECIFICATIONS :

- Removable stainless steel filter
- PN16 Flanges R.F.
- Horizontal or vertical position with descendant fluid (respect the flow direction indicated by the arrow)
- Mesh 8/10° mm (800 μ) up to DN 50 , 10/10° mm from DN 65 to 80 and 30/10° over
- Bolted bonnet with draining cap threaded BSP

USE :

- For Chemical and pharmaceutical industries, petrochemical industries, hydraulic installation, compressed air
- Min Temperature Ts : - 40°C
- Max Temperature Ts : + 200°C
- Max Pressure Ps : 16 bars (see graph)
- Steam : 10 bars maximum

PRESSURE / TEMPERATURE GRAPH (STEAM EXCLUDED) :

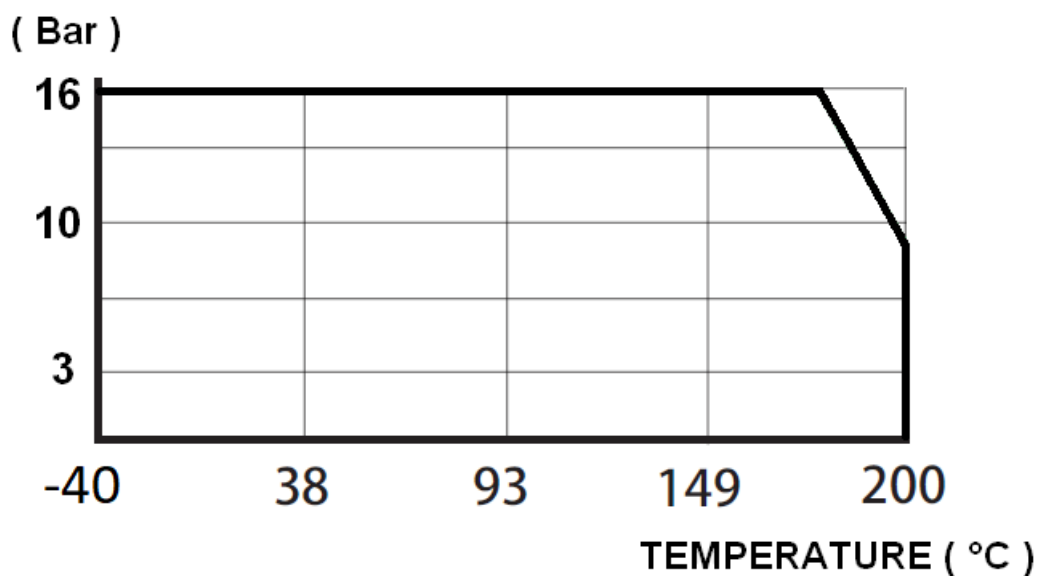

FLOW COEFFICIENT Kv (M3 / h) :

DN	15	20	25	32	40	50	65	80	100	125	150	200
Kv (m3/h)	2.59	6.05	12.1	17.3	27.7	56.2	85.5	138.4	259.5	415.1	605.4	882.3


RANGE :

- Stainless steel Y strainer low temperature PN10/16 Flanges R.F. from DN 15 to DN 150 and PN16 for DN200


FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE

HEAD LOSS GRAPH :

DN 15 - 40

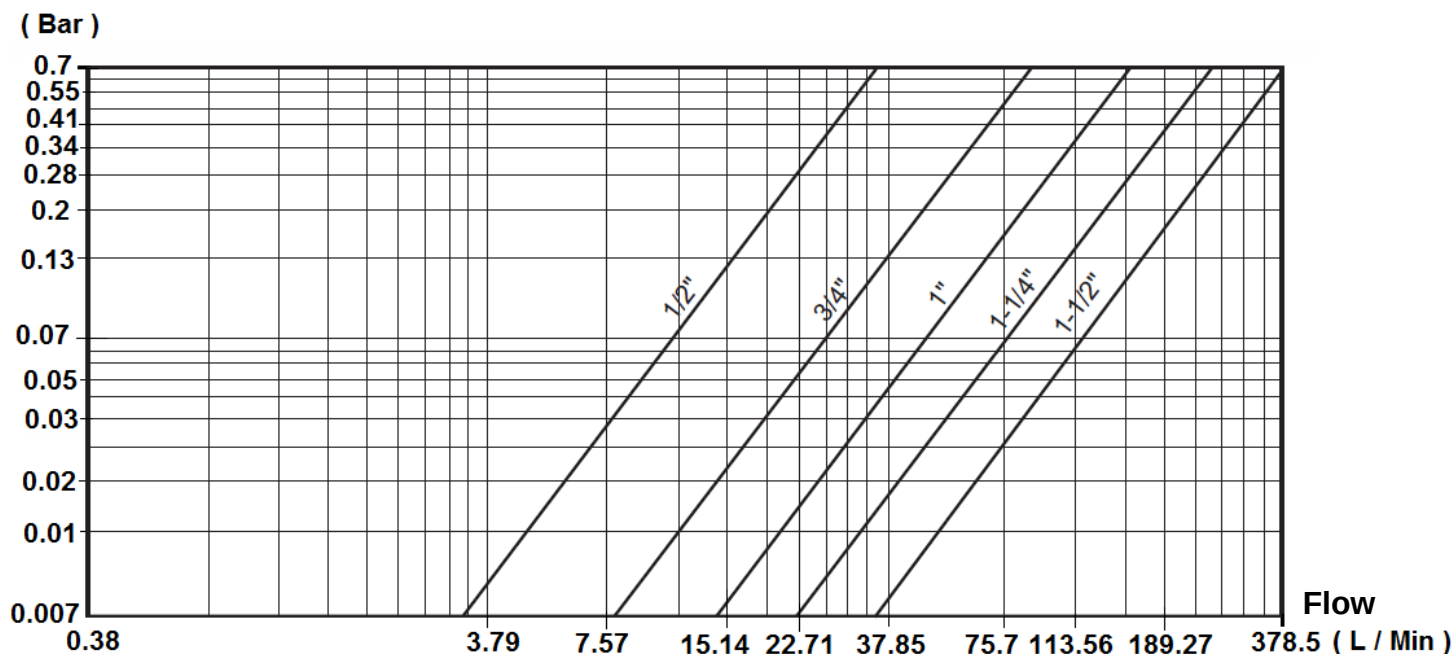


DN 50 - 200

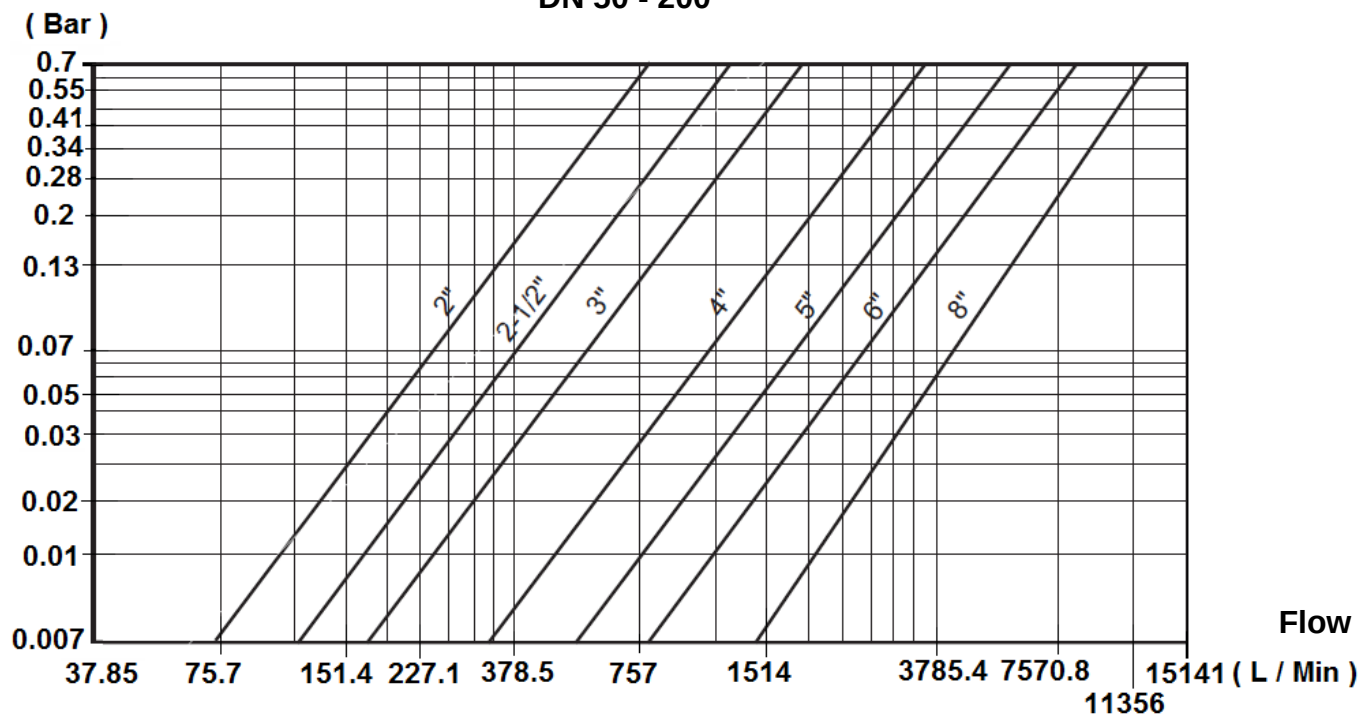

FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE


MATERIALS :

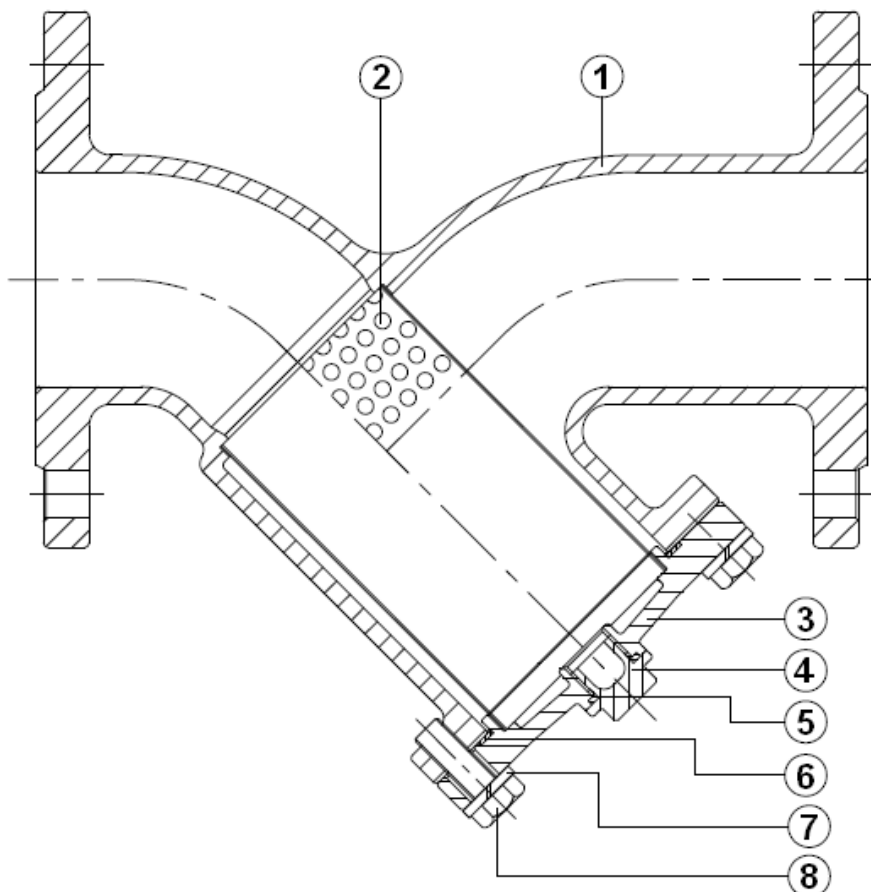

Item	Designation	Materials
1	Body	EN 1.4408
2	Filter	AISI 316
3	Bonnet	EN 1.4408
4	Draining cap	
5	Gasket	TFM 4215
6	Bonnet gasket	
7	Washer	AISI 304
8	Screw	

FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE


SIZE (in mm) :

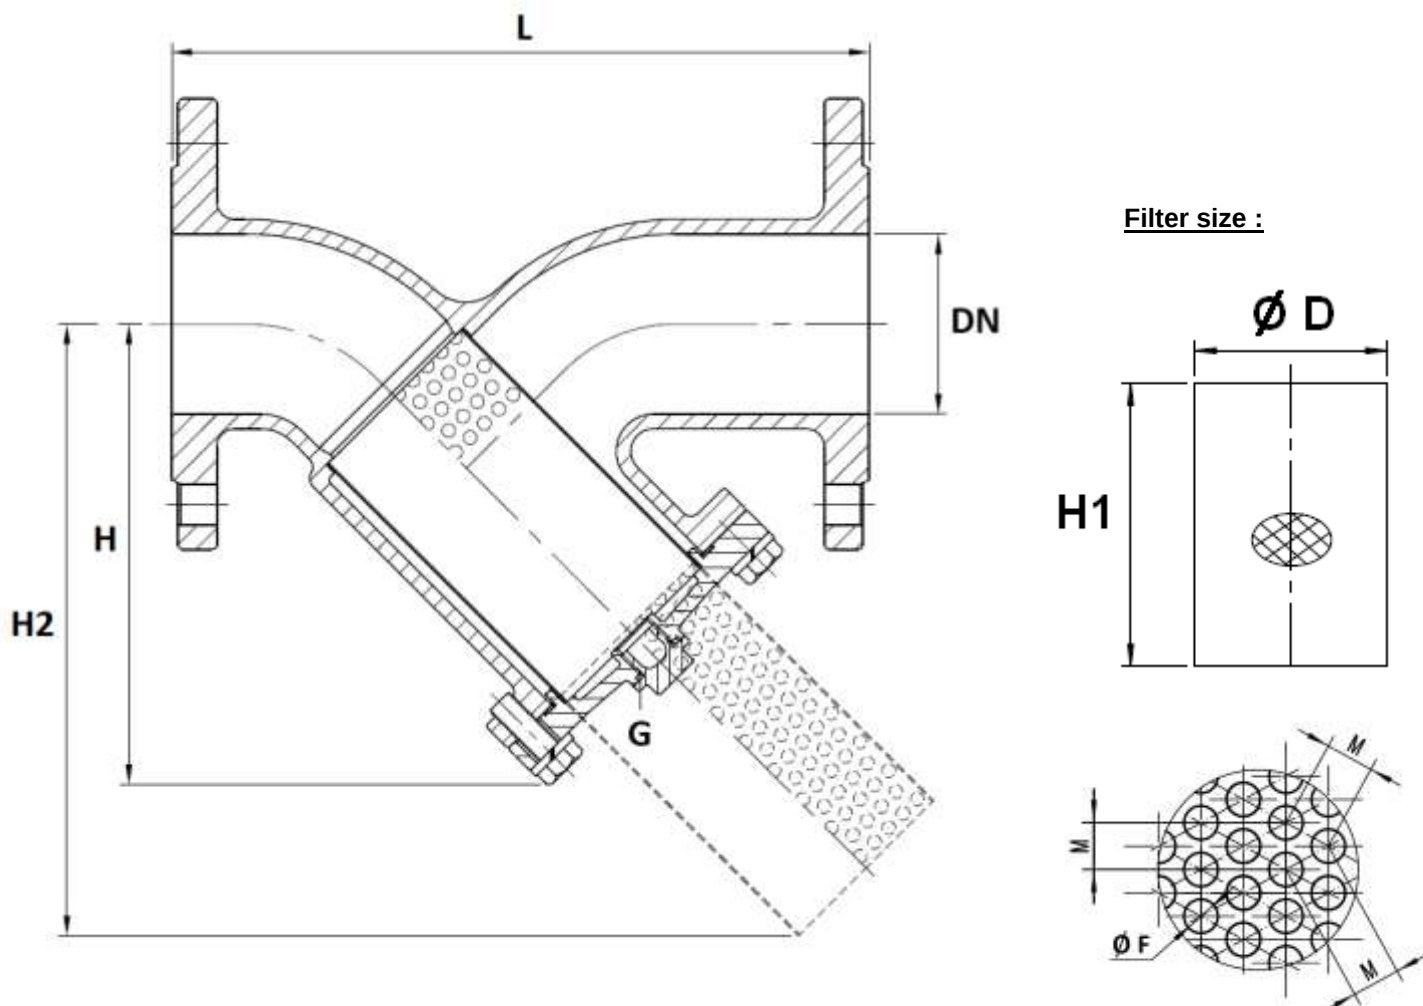

DN	15	20	25	32	40	50	65	80	100	125	150	200
L	130	150	160	180	200	230	290	310	350	400	480	600
H	85	85	112	114	132	150	185	200	232	274	328	410
H2 (mini)	104	99	149	144	171.5	192.5	250	272	306	396	456	574
G (drain)	1/2"								3/4"			
Ø D	18	23	29	40	43	54	68	84	103	130	154	208
H1	57	55	88	82	100	103	135	150	159	220	250	300
Mesh (Ø F)	0.8						1		3			
M	1.8						2		4			
Weight (Kg)	2	2.7	3.5	5	6.1	8.1	12.3	15.5	22	30	41	77.1

FLANGED STAINLESS STEEL Y STRAINER PN16 DIN F1 LOW TEMPERATURE

PN16 FLANGES SIZE (in mm) :

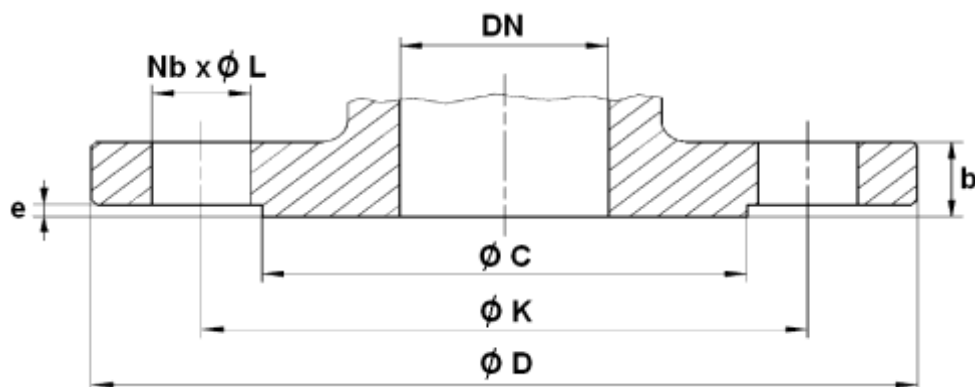

DN	15	20	25	32	40	50	65	80	100	125	150	200
Ø C	45	58	68	78	88	102	122	138	158	188	212	268
Ø D	95	105	115	140	150	165	185	200	220	250	285	340
Ø K	65	75	85	100	110	125	145	160	180	210	240	295
Nb x Ø L	4 x 14	4 x 14	4 x 14	4 x 18	4 x 18	4 x 18	4 x 18	8 x 18	8 x 18	8 x 18	8 x 22	12 x 22
b	14	16	16	16	16	18	18	20	20	22	22	24
e	2	2	2	2	3	3	3	3	3	3	3	3